



# Acoustic Pulse Recognition (APR)

## Combines the best of other touch technologies

**Elo Acoustic Pulse Recognition (APR)** touchscreens use a completely new and unique way of sensing touches on a display. Consisting only of a glass overlay mounted in front of the display, together with a small electronic controller board, Elo's APR technology provides a new set of benefits that have only been partially achieved before by other touch technologies.

APR combines the ultimate in optical qualities, durability, and stability of surface wave (SAW) and infrared technologies, with the excellent dragging properties of capacitive, along with stylus, glove and fingernail activation, and low cost advantages of resistive technology. In addition, it is resistant to water and other contaminants on the screen, can be scaled from PDA to 42-inch displays, and provides palm rejection during signature capture.

As with many of the best inventions in history, APR works in a simple and elegant way—by recognizing the sound created when the glass is touched at a given position.

### Benefits

- Optics and durability of pure glass
- Works with finger, glove, pen, credit card
- Resistant to water, dust, grease
- No wear-out mechanism
- Works even with scratches
- Excellent drag performance
- Sealable to NEMA 4/IP 65 standards
- One time factory calibration, no drift
- Thin borders—only 5mm
- True flat surface
- Small and large sizes
- Palm rejection for signature capture

### Applications

- Restaurant and hospitality automation
- Retail Point-of-Sale (POS) terminals
- Pharmacy automation
- Industrial automation
- Office automation

# Acoustic Pulse Recognition Specifications

## MECHANICAL

Input Method Finger, finger nail, gloved hand, or stylus activation

## ELECTRICAL

Positional Accuracy 1% max. error

Resolution Accuracy Touchpoint density is based on controller resolution of 4096 x 4096

Touch Activation Force Typically 2 to 3 ounces (55 to 85 grams)

Controller Board: USB

## OPTICAL

Light Transmission 92% +/-2%

## ENVIRONMENTAL

Temperature Operating: -20°C to 60°C  
Storage: -40°C to 71°C

Relative Humidity Operating: 90% RH at max 50°C for 240 hours, noncondensing

Altitude Operating: 10,000 ft (3,048 m)  
Storage/transport: 50,000 ft (15,240 m)

Chemical Resistance The touch activation area of the touchscreen is resistant to chemicals that do not affect glass such as: acetone, toluene, methyl ethyl ketone, isopropyl alcohol, methyl alcohol, ethyl acetate, ammonia-based glass cleaners, gasoline, kerosene, vinegar

Electrostatic Protection Per EN 61000-4-2, 1995: Meets Level 4 (15kV air/8kV contact discharges)

Agency Approvals UL, cUL, TÜV, CE, FCC Class A

Sealability Can be sealed to meet NEMA 4 and 12 and IP 65 standards


## DURABILITY

Surface Durability Surface durability is that of glass, Mohs' hardness rating of 7

Expected Life No known wear-out mechanism, as there are no layers, coatings, or moving parts. APR technology has been operationally tested to more than 50 million touches in one location without failure, using a stylus similar to a finger.

Impact Resistance Can meet UL-60950 and CSA 22.2 No. 60950 ball drop test (0.5 kg, 50 mm diameter ball dropped from height of 1.3 m)

Warranty Touchscreen: 10-year limited warranty  
Controller: 5-year limited warranty

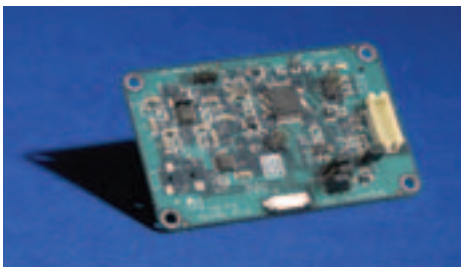

7000 USB controller board

Find out more about the extensive range of Elo touch solutions. Go to [www.elotouch.eu](http://www.elotouch.eu) or simply call the office nearest you.

### Corporate Headquarters

Tel +1 650 361 4700  
Fax +1 650 361 4747  
[eloinfo@elotouch.com](mailto:eloinfo@elotouch.com)  
[www.elotouch.com](http://www.elotouch.com)

### European Headquarters

Tel +32 16 35 21 00  
Fax +32 16 35 21 01  
[elosales@elotouch.com](mailto:elosales@elotouch.com)  
[www.elotouch.eu](http://www.elotouch.eu)

### Asia-Pacific Headquarters

Tel +81 45 478 2161  
Fax +81 45 478 2180  
[info@tps.co.jp](mailto:info@tps.co.jp)  
[www.tps.co.jp](http://www.tps.co.jp)

### Latin America Headquarters

Tel +1 305 428 5210  
Fax +1 305 717 4909  
[eloinfo@elotouch.com](mailto:eloinfo@elotouch.com)  
[www.elotouch.com.ar](http://www.elotouch.com.ar)



Tyco Electronics Corporation reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

AccuTouch, COACH, Elo TouchSystems, IntelliTouch, TE Logo, and Tyco Electronics are trademarks.  
Copyright 2007 Tyco Electronics Corporation 8/07.



Our commitment. Your advantage.